




SPECIFICATIONS

- Transformer:** One 40 VA and One 75 VA Split-Bobbin
- Over Current Protection:** Circuit Breaker
- Input Wires:** **"B10" Models Only**
 Input Power Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground
- All Other Models**
 40 VA Primary Wires 75 VA Primary Wires
 BLK: 120 Vac GRY: 480 Vac
 WHT: Common BRN: 277 Vac
Outlet Wires
 BLK: 120 Vac ORG: 240 Vac
 WHT: Neutral RED: 208 Vac
 GRN: Ground BLK: Common
- Output Wires:** **"B10" Models Only** **"W" Models Only**
 Auxiliary Output Transformer Output
 BLU: 120 Vac WHT/YEL: 24 Vac
 WHT/BLU: Common
- Frequency:** 50/60 Hz
- 24 Vac ON/OFF:** On / Off Switch & Breaker: 75 VA
 On / Off Switch: 40VA
- Main Breaker ON/OFF:** Switch / Breaker (10 Amp)
 (Kills power to entire unit: Outlets (if Present), Aux. Output, and Transformer)**
- Approvals:** Class 2 UL Listed, UL916, C-UL, CE, RoHS
- Dimensions:** 4.500" x 8.625" x 4.500"
- Weight:** 6.800 lbs.

AC Power Supply

PSH40A75A Series

Enclosed 40 VA (120 to 24 Vac) and 75 VA (Multi-Tap to 24 Vac) Power Supplies

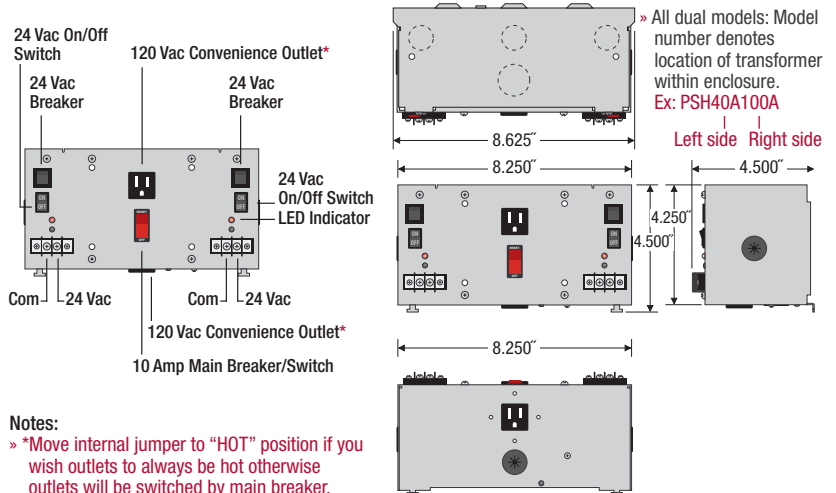

Notes:
 » *Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

PSH40A75A Series Selection Guide

MODEL #	120 VAC OUTLETS	AUX OUTPUT WIRE	MAIN BREAKER ON INPUT POWER	SECONDARY CONFIGURATION
PSH40A75A	•			External Terminal Strip
PSH40A75AN				External Terminal Strip
PSH40A75ANW				Internal Wires
PSH40A75AW	•			Internal Wires
PSH40A75AB10**	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH40A75ANB10**		•	10 Amp Switch / Breaker	External Terminal Strip
PSH40A75ANWB10**		•	10 Amp Switch / Breaker	Internal Wires
PSH40A75AWB10**	•	•	10 Amp Switch / Breaker	Internal Wires

Notes