



SPECIFICATIONS

Transformer: One 75 VA and One 100 VA Split-Bobbin
Over Current Protection: Circuit Breaker

Input Wires: "B10" Models Only
Input Power Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground

All Other Models **100 VA Primary Wires**
 75 VA Primary Wires BLK: 120 Vac
 GRY: 480 Vac WHT: Common
 BRN: 277 Vac Outlet Wires
 ORG: 240 Vac BLK: 120 Vac
 RED: 208 Vac WHT: Neutral
 WHT: 120 Vac GRN: Ground
 BLK: Common


Output Wires: "B10" Models Only "W" Models Only
Auxiliary Output **Transformer Output**
 BLU: 120 Vac WHT/YEL: 24 Vac
 WHT/BLU: Common

Frequency: 50/60 Hz
24 Vac ON/OFF: On / Off Switch & Breaker
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 (Kills power to entire unit: Outlets (If Present), Aux. Output, and Transformer)**
Total Combined Output 9A
Approvals: Class 2 UL Listed, UL916, C-UL, CE, RoHS
Dimensions: 4.500" x 8.625" x 4.500"
Weight: 8.500 lbs.

AC Power Supply

PSH75A100A Series

Enclosed 75 VA (Multi-Tap to 24 Vac) and 100 VA (120 to 24 Vac) Power Supplies

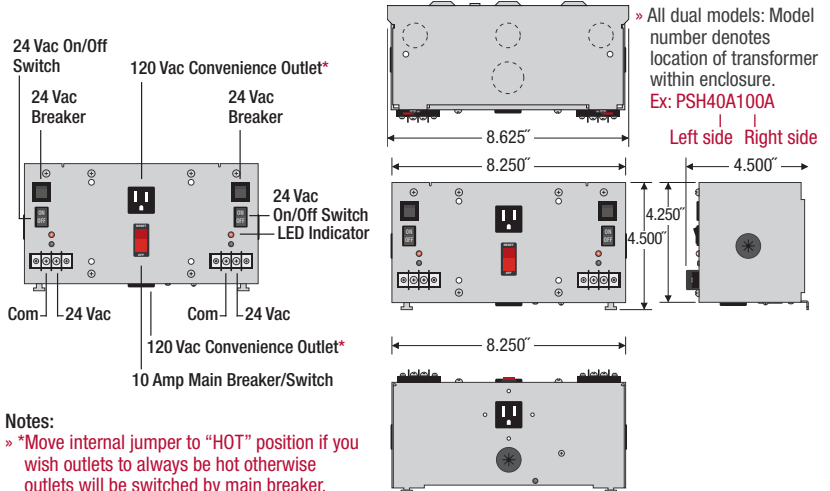

Notes:

» *Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

PSH75A100A Series Selection Guide

MODEL #	120 VAC OUTLETS	AUX OUTPUT WIRE	MAIN BREAKER ON INPUT POWER	SECONDARY CONFIGURATION
PSH75A100A	•			External Terminal Strip
PSH75A100AN				External Terminal Strip
PSH75A100ANW				Internal Wires
PSH75A100AW	•			Internal Wires
PSH75A100AB10**	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH75A100ANB10**	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH75A100ANWB10**	•	•	10 Amp Switch / Breaker	Internal Wires
PSH75A100AWB10**	•	•	10 Amp Switch / Breaker	Internal Wires

Notes