




Features & Options

- Averaging Lengths: 8', 12' and 24'
- Three Enclosure Styles

BAPI Duct Averaging Units feature closed cell foam to seal the probe insertion hole and absorb vibration. Mounting tabs allow for easy installation to the duct. All units have etched Teflon leadwires and encapsulated sensors to create a watertight package that can perform under real world conditions.

Averaging probes should be used wherever there is a chance for stratified layers of hot and cold air. Averaging probes are made of bendable aluminum tubing and measure temperature along their entire length. Nylon tie straps are provided for mounting.

Duct Averaging Units come standard with a 2"x4" steel J-Box but are also available with no box or the new BAPI-Box Crossover enclosure.

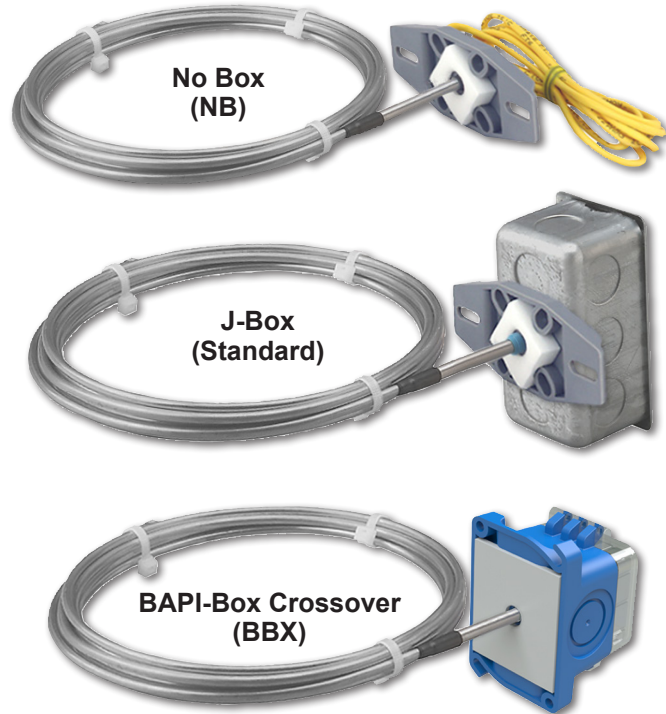

Flexible Probe Bracket for Mounting Averaging Sensors

The Flexible Probe Bracket (FPB) is used to mount averaging sensors, low limit thermostats, or liquid fill thermostats.

The bracket is used to reverse the direction of the flexible probe with a smooth arc to eliminate the risk of kinking the sensor and damaging the probe. A fixed 1/4" probe may also be mounted as part of the bracket design using the scored break-off.

(See the Accessories Section for more information.)

Specifications

Environmental Operation Range:

Temperature:

BAPI-Box Crossover: -40 to 85 °C

Other Enclosures: -40 to 100 °C

Humidity: 0 to 95%, non-condensing

Sensing Element:

Thermistor or RTD (See Sensors Section for Specs.)

Probe Material:

Bendable Aluminum, 3/16" diameter

Enclosure Material:

Junction Box: Galvanized Steel

BAPI-Box Crossover:

Cover: Polycarbonate, UL94 V-0 • Base: Nylon, UL94 HB

Enclosure Rating:

Junction Box: IP20, NEMA 1

BAPI-Box Crossover (BBX):

IP10, NEMA 1

IP44 with knockout plug in open port

Encl. Dimensions: H x W x D

BAPI-Box Crossover:

3.1 x 2.2 x 1.9" (79 x 56 x 49mm)

Junction Box

4.2 x 3.9 x 1.94" (106 x 98.4 x 49mm)

(For enclosure dimension drawings, see the end of the section.)





Use the Option Selection Guide below to create your custom part number. Replace the number and parenthesis with the designator for each selection. Skip the designator and dashes for optional selections that are not required in your configuration.

Duct Averaging Sensor Option Selection Guide



BA/ (#1) - (#2) - (#3) - (#4)

#1: Temperature Sensor (required)

- 1.8K1.8K Thermistor
- 3K3K Thermistor
- 10K-210K-2 Thermistor
- 10K-310K-3 Thermistor
- 10K-3[11K].....10K-3[11K] Thermistor
- 20K20K Thermistor
- 1K[375]1K Platinum RTD (375 curve)
- 1K1K Platinum RTD (385 curve)

Transmitters below require a BAPI-Box Crossover Enclosure

- T1K[32 TO 212F].....1K Plat. RTD Transmitter, 4 to 20 mA Output, 32 to 212°F Range
- T1K[20 TO 120F].....1K Plat. RTD Transmitter, 4 to 20 mA Output, 20 to 120°F Range
- T1K[0 TO 100F].....1K Plat. RTD Transmitter, 4 to 20 mA Output, 0 to 100°F Range
- T1K[0 TO 100C]1K Plat. RTD Transmitter, 4 to 20 mA Output, 0 to 100°C Range
- T1K[-7 TO 49C]1K Plat. RTD Transmitter, 4 to 20 mA Output, -7 to 49°C Range
- T1K[-18 TO 38C]1K Plat. RTD Transmitter, 4 to 20 mA Output, -18 to 38°C Range

Matched Transmitters are also available. Contact your BAPI representative for ordering.

#2: Probe Type and Length (required)

- A-8'Flexible Averaging, 8' (2.4m) length
- A-12'Flexible Averaging 12' (3.7m) length
- A-24'Flexible Averaging 24' (7.3m) length

#3: Enclosure and Lead Length (optional, J-Box comes standard)

- BBX BAPI-Box Crossover (IP10, NEMA 1)
- NB.....No Box (comes with 6" Etched Teflon Leads)

#4: Test & Balance or Terminal Strip (optional, requires a BAPI-Box Crossover Enclosure)

- TBTest & Balance Switch
- TSTerminal Strip Connection (The \$7 does not apply to T1K transmitter units)

Certain sensor types or lengths may not be available at this time. Please contact your BAPI representative for full availability and pricing.

Additional options are available for these units but not shown in the configurator above. Contact your BAPI representative for the complete list of options.

Example Number: BA/ (10K-2) - (A-8') - (BBX) - ()

Actual Number (with parenthesis removed): BA/10K-2-A-8'-BBX

Description: 10K-2 Thermistor, Duct Averaging Sensor, BAPI-Box Crossover Enclosure

Your Number: BA/

Gray shaded items follow the Buy and Resale Multiplier.

