



## SPECIFICATIONS

Transformer: Two 75 VA Split-Bobbin  
Over Current Protection: Circuit Breaker  
Input Wires: **"B10" Models Only**  
Input Power Wires  
BLK: 120 Vac  
WHT: Neutral  
GRN: Ground

### All Other Models

#### Primary Wires

GRY: 480 Vac  
BRN: 277 Vac  
ORG: 240 Vac  
RED: 208 Vac  
WHT: 120 Vac  
BLK: Common

#### Outlet Wires

BLK: 120 Vac  
WHT: Neutral  
GRN: Ground

### Output Wires: "B10" Models Only

Auxiliary Output  
BLU: 120 Vac

### "W" Models Only

Transformer Output  
WHT/YEL: 24 Vac  
WHT/BLU: Common

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp)

(Kills power to entire unit: Outlets (if Present), Aux. Output, and Transformer)\*\*  
Total Combined Output 9A

Approvals: Class 2 UL Listed, UL916, C-UL, CE, RoHS


Dimensions: 4.500" x 8.625" x 4.500"

Weight: 8.400 lbs.

## AC Power Supply

### PSH75A75A Series

Enclosed Dual 75 VA Power Supplies, 480/277/240/208/120 to 24 Vac

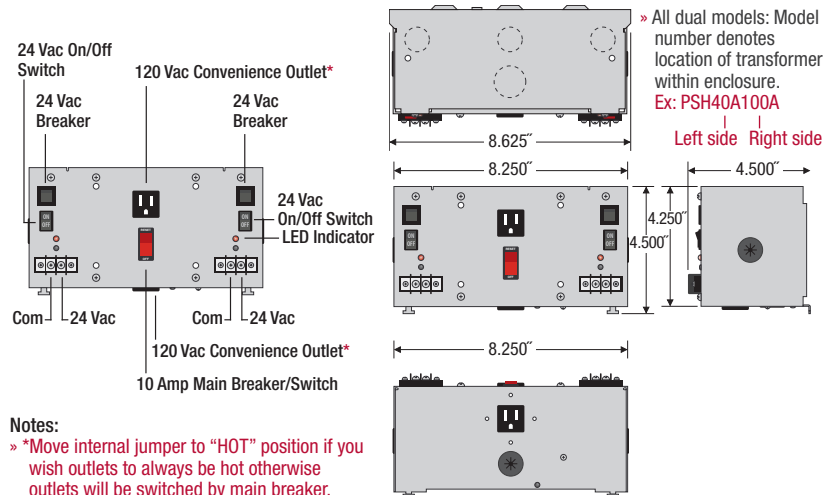

### PSH75A75A Series Selection Guide

MODEL #	120 VAC OUTLETS	AUX OUTPUT WIRE	MAIN BREAKER ON INPUT POWER	SECONDARY CONFIGURATION
PSH75A75A	•			External Terminal Strip
PSH75A75AN				External Terminal Strip
PSH75A75ANW				Internal Wires
PSH75A75AW	•			Internal Wires
PSH75A75AB10**	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH75A75ANB10**		•	10 Amp Switch / Breaker	External Terminal Strip
PSH75A75ANWB10**		•	10 Amp Switch / Breaker	Internal Wires
PSH75A75AWB10**	•	•	10 Amp Switch / Breaker	Internal Wires

## Notes