




AC Power Supply

PSH300A

Enclosed 300VA Power Supply with Three 100VA Class 2 Outputs, 480/277/240/120 Vac to 24 Vac

PSMN300A

Sub-Panel Mounted 300VA Power Supply with Three 100VA Class 2 Outputs, 480/277/240/120 Vac to 24 Vac

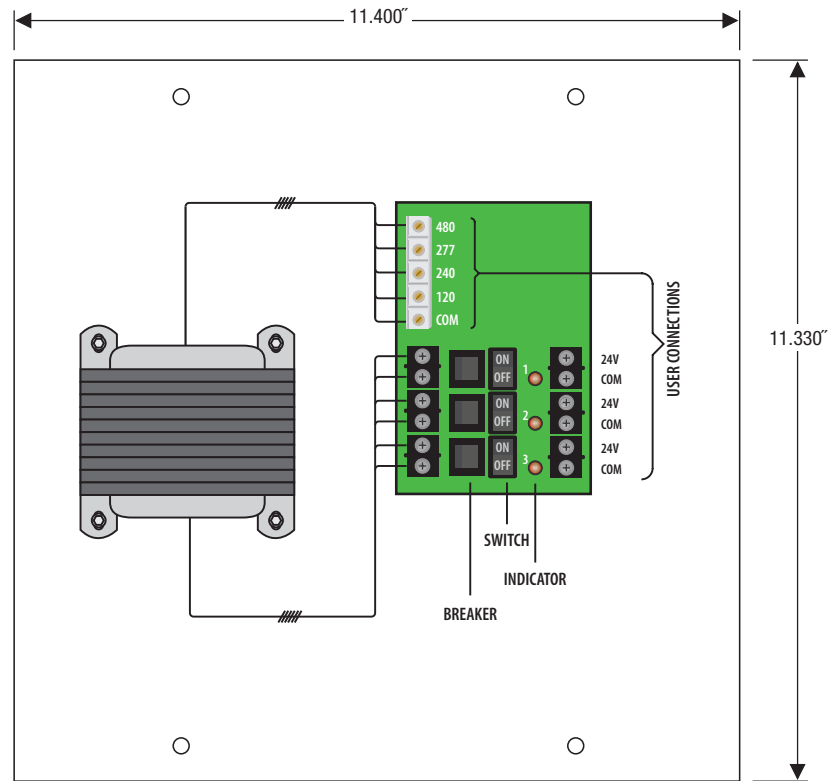

SPECIFICATIONS

Transformer: One (1) 300 VA
Over Current Protection: Circuit Breaker
Primary: 480/277/240/120 Vac
Frequency: 50/60 Hz
Dimensions: 12.125" x 12.125" x 6.000" (PSH300A)
 11.330" x 11.400" x 4.500" (PSMN300A)
Approvals: Class 2 UL Listed, UL916, UL508, C-UL, CE, RoHS
Sub-Panel: Plenum Rated Polymetal Sub-Panel
Housing: NEMA1 Metal Enclosure
Weight: 18.08 lbs. (PSH300A)
 12.06 lbs. (PSMN300A)

3 Secondaries:
 24 Vac, with LED Indicators
24 Vac ON/OFF:
 On / Off Switch & Breaker

Input:
 480/277/240/120 Vac Finger-Safe Terminals, 8-18 AWG
Output:
 3 Isolated 100 VA Class 2 24 Vac Terminals, 12-26 AWG

Notes:
 » To order UL508, add "-IC" to end of model number.

Standby Wattage:
 16.61 W @ 120 Vac
 17.70 W @ 240 Vac
 16.26 W @ 277 Vac
 19.20 W @ 480 Vac

Full Load Primary Current:
 2.66 A @ 120 Vac
 1.36 A @ 240 Vac
 1.18 A @ 277 Vac
 0.68 A @ 480 Vac

Ambient Temperature Derating:
 4A up to 40° C ; 3A up to 50° C ; 2A up to 55° C
 (When All 3 Outputs Operated Simultaneously)

Great for VAV Applications