




Current Sensors

RIBXRF

Enclosed Solid Ring Remote **Fixed** 1.25-150 Amp Current Sensor

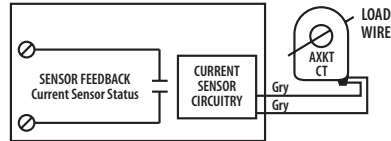


Solid State Contact
 30 Vac/dc
 .4 Amp Max.

When current sensor status is off (open),
 leakage <30 uA @ 30Vac/dc
 When current sensor status is on (closed),
 voltage drop < .3 Vac/dc @ .1 Amp
 < 1.6 Vac/dc @ .4 Amp

RIBXRA

Enclosed Solid Ring Remote **Adjustable** 1.25-150 Amp Current Sensor

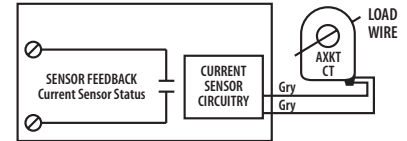

Solid State Contact
 30 Vac/dc
 .4 Amp Max.

When current sensor status is off (open),
 leakage <30 uA @ 30Vac/dc
 When current sensor status is on (closed),
 voltage drop < .3 Vac/dc @ .1 Amp
 < 1.6 Vac/dc @ .4 Amp

SPECIFICATIONS

Operating Temperature: -30 to 140° F
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Remote Dimensions: 1.863" x 1.460", .500" Inside Diameter
Wire Length: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL, California State Fire Marshal, CE, RoHS
Housing Rating: Plenum, NEMA 1

Sensor Type: External, with contact status
Sensor Threshold: Fixed, 1.25 Amps (RIBXRF)
 Adjustable, 1.25-150 Amps (RIBXRA)
Sensor Range: 1.25-150 Amps
Sensor Output: Solid State Contact 30 Vac/dc, 0.4 Amp
Max Sense Voltage: 600 Vac

Notes