



SIB02S-RD
 SIB04S-RD
 SIB05S-RD
 SIBLS-RD
 » Red housing

SPECIFICATIONS

Operating Temperature: -30 to 140° F
 Dimensions: 1.700" x 2.800" x 1.500"
 (w/ .500" NPT Nipple)
 Wires: 16", 600V Rated
 Approvals: UL Listed, UL916, C-UL, CE, RoHS
 Housing Rating: Plenum, NEMA 1

SIB02S, SIB04S, RIB05S
Switch Ratings:
 20 Amp Resistive @ 277 Vac
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 20 Amp Ballast @ 277 Vac
 10 Amp Tungsten @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac


SIBLS Switch Ratings:
 5 Amp @ 30 Vac/dc

Notes:
 » Switch position label can be custom printed according to your needs, simply consult factory
 » Connection to Wht/Yel may be omitted if LED is not needed (SIBLS)

Prepackaged Switches


SIB02S

Enclosed Switch **20 Amp, 3 Position** Maintained, On/Off/On

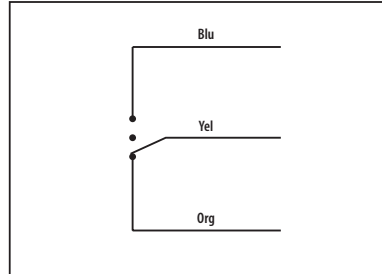

SIB04S

Enclosed Switch **20 Amp, 2 Position** Maintained, On/On, **3 Wires**

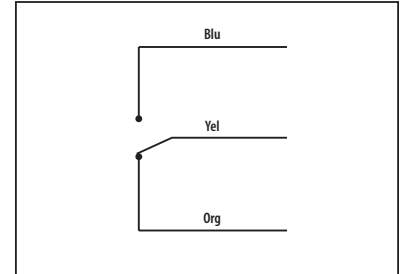


Notes:

» Order with Momentary Override Switch by adding "-MNO" to end of model number


SIB05S

Enclosed Switch **20 Amp, 2 Position** Maintained, On/Off, **2 Wires**

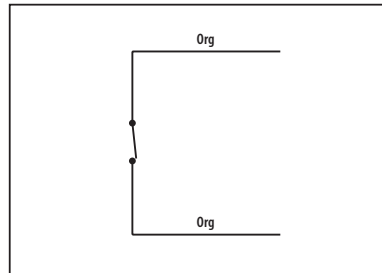

SIBLS

Enclosed Switch **5 Amp, 30 Vac/dc, 3 Position** Maintained, On/Off/On **with LED Indicator**

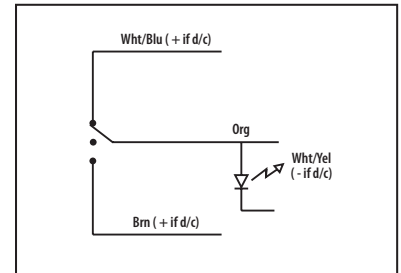

Notes:

» Order with Momentary Override Switch by adding "-MNO" to end of model number

Notes