


Series 851D

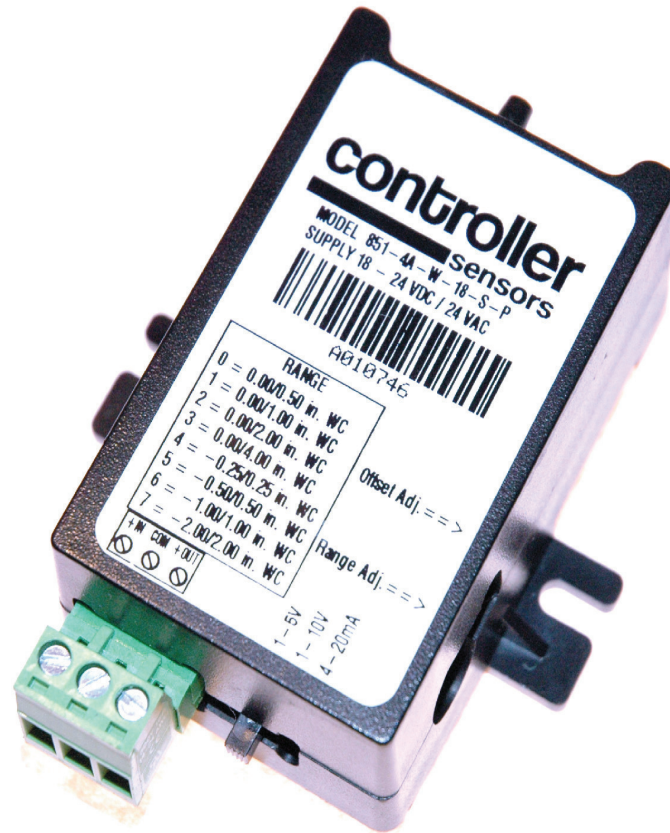

Output Options:

Model 851D-0x	Selectable: 1-5 V, 1-10 V, 4-20 mA 3 wire
Model 851D-1x	Reserved
Model 851D-2x	Reserved
Model 851D-3x	Reserved
Model 851D-4x	Reserved
Model 851D-5x	Special Instructions

Calibration Pressure Options:

Model 851D-x0	4.0" WC-FSO (Selectable 4.0", 2.0", 1.0", 0.5", +2.0", +1.0", +0.5", +0.25")
Model 851D-x1	12.0" WC-FSO (Selectable 12.0", 6.0", 3.0", 1.5", +6.0", +3.0", +1.5", +0.75")
Model 851D-x2	4.0 PSI-FSO (Selectable 4.0, 2.0, 1.0, 0.5 PSI, +2.0, +1.0, +0.5, +0.25 PSI)
Model 851D-x3	12 PSI-FSO (Selectable 12.0, 6.0, 3.0, 1.5 PSI, +6.0, +3.0, +1.5, +0.75 PSI)
Model 851D-x4	40 PSI-FSO (Selectable 40.0, 20.0, 10.0, 5.0 PSI, +20.0, +10.0, +5.0, +2.5 PSI)
Model 851D-x5	Special Instructions
Model 851D-x6	2.0" WC-FSO (Selectable 2.0", 1.0", 0.5", 0.25", +1.0", +0.5", +0.25", +0.125")

Example: Requirement is for different pressure ranges (0-6" WC, +1.5" WC) and output configurations (1-5V, 1-10 V). Order one product based on the FSO (Full Scale Output) requirement, Series 850D-01 that provides the intermediate pressures required then set it yourself using the easily accessible external switches to the desired pressure range and output depending on your need at the time.