





## Transformer



### TR100VA002

Transformer 100 VA, 120 to 24 Vac, Circuit Breaker, Foot and Dual Threaded Hub Mount



\*Secondary Yel/Wht wire in phase with Primary Blk wire.

Mounting Hole = .350" x .175"

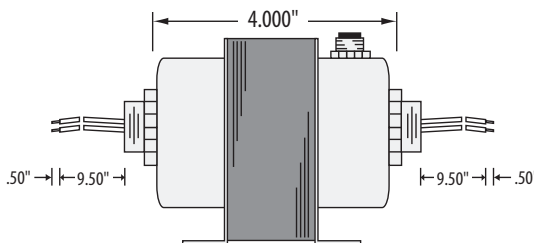

### SPECIFICATIONS

- VA Rating: 100
- Frequency: 50/60 Hz
- Mounting: Foot & Dual Threaded Hubs
- Over Current Protection: Circuit Breaker
- Dimensions: 3.000" x 2.500" x 4.000"  
(w/ .500" NPT Hubs)
- Wire Length: 9.5" Typical w/ .5" Strip
- Operating Temperature: -30 to 140° F
- MTBF: 100,000 Hours @ 77° F
- Construction: Split-Bobbin
- Weight: 4.13 lbs.
- Approvals: Class 2 UL5085-3 Listed, C-UL, CE, RoHS

### Notes