





## Transformer



### TR40VA022

Transformer 40 VA, 120 to 24 Vac, Foot and Dual Threaded Hub Mount with 30.00" Secondary Wires



\*Secondary Yel/Wht wire in phase with Primary Blk wire.

Mounting Hole = .320" x .175"

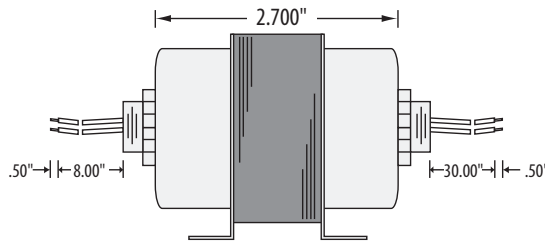

### SPECIFICATIONS

- VA Rating: 40
- Frequency: 50/60 Hz
- Mounting: Foot & Dual Threaded Hubs
- Over Current Protection: Inherently Limited
- Dimensions: 2.875" x 2.200" x 2.700"  
(w/ .500" NPT Hubs)
- Wire Length: 8" Primary, 30" Secondary, w/ .5" Strip
- Operating Temperature: -30 to 140° F
- MTBF: 100,000 Hours @ 77° F
- Construction: Split-Bobbin
- Weight: 2.05 lbs.
- Approvals: Class 2 UL5085-3 Listed, C-UL, CE, RoHS

### Notes