


## Transformer

### TR40VA040


Transformer 40 VA, 240/208/120 to 24 Vac, Dual Terminal Secondary, Foot and Single Threaded Hub Mount

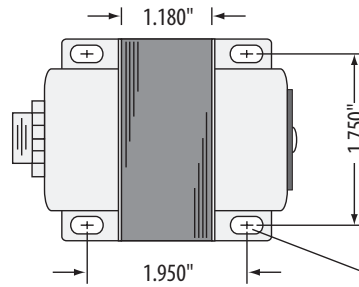



#### PRIMARY WIRES

Org - 240 Vac  
 Red - 208 Vac  
 Wht - 120 Vac  
 Blk - Comm

#### SECONDARY TERMINALS



Mounting Hole = .320" x .175"

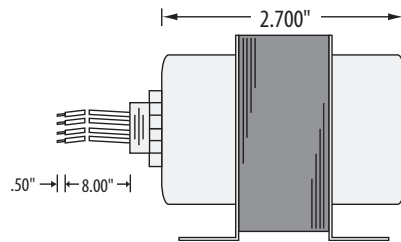

### SPECIFICATIONS

- VA Rating:** 40VA
- Frequency:** 50/60 Hz
- Mounting:** Foot & Single Threaded Hub  
TRMP44K0 Mounting Plate Provided
- Over Current Protection:** Thermal Fuse
- Dimensions:** 2.875" x 2.200" x 2.700"  
(w/ .500" NPT Hub)
- Wire Length:** 8" Typical w/ .5" Strip
- Operating Temperature:** -30 to 140° F
- MTBF:** 100,000 Hours @ 77° F
- Construction:** Split-Bobbin
- Weight:** 1.96 lbs.
- Approvals:** Class 2 UL5085-3 Listed, C-UL, CE, RoHS

### Notes