



Functional Devices, Inc.

310 South Union Street Russiaville, IN 46979

www.FunctionalDevices.com

Office 765.883.5538 Sales 800.888.5538 Fax 765.883.7505

Email sales@FunctionalDevices.com











VA Rating: 50

Frequency: 50/60 Hz

Frequency: 50/60 Hz
Mounting: Foot & Dual Threaded Hubs
Over Current Protection: 3 Amp Fuse
Dimensions: 2.875" x 2.200" x 2.790"
(w/ .500" NPT Hubs)
Wire Length: 8" Typical w/ .5" Strip
Operating Temperature: -30 to 140° F
MTBF: 100,000 Hours @ 77° F
Construction: Split-Bobbin


Construction: Split-Bobbin Weight: 2.17 lbs.

Approvals: Class 2 UL5085-3 Listed, C-UL, CE, RoHS

Transformer

TR50VA007

Transformer 50 VA, 277 to 24 Vac, Foot and Dual Threaded Hub Mount

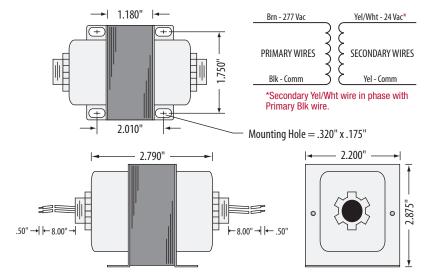

Notes