


2 LEADS, (1) BLK AND (1) WHT, #18 AWG STRANDED WIRE .031 THICK INSUL. TO EXTEND 20±1" BEYOND INSUL. BUSHING LEADS SKINNED .625

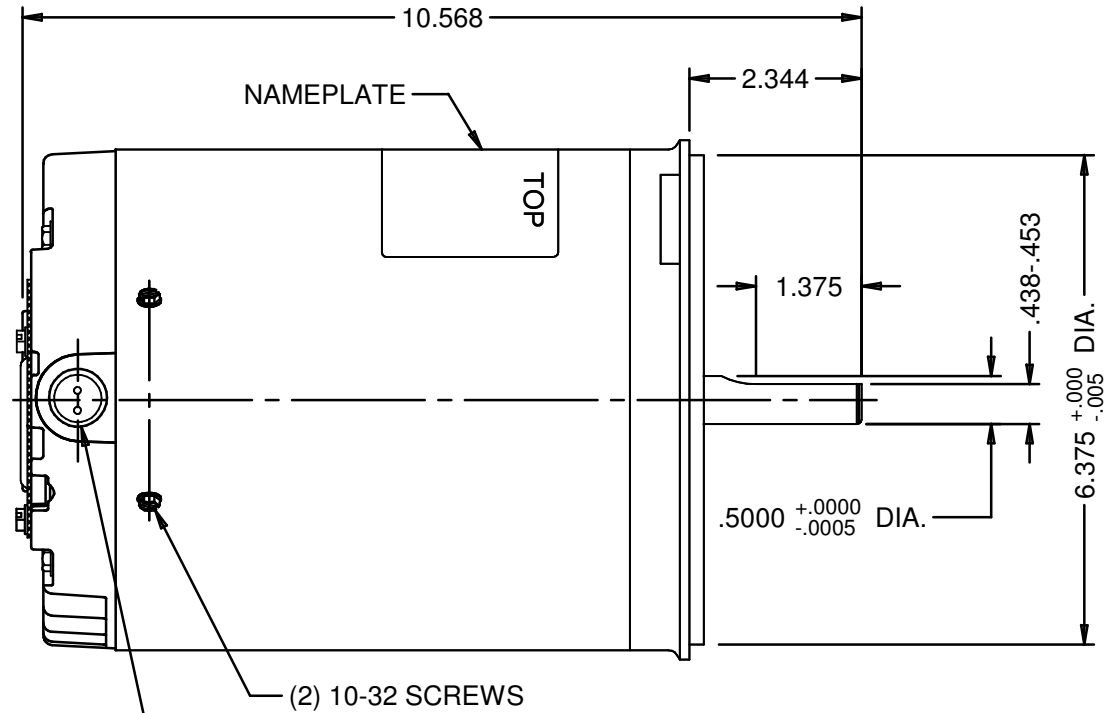

(2) 10-32 SCREWS
INSULATING BUSHING CAN BE REMOVED AND STANDARD CONDUIT FITTING APPLIED (1/2-14 NPSM THD)

SUPPLIED DETACHED:
1 - FORM, INSTALL.
1 - SHAFT KEY
1 - 5/8 BUSHING
1 - GASKET ASM.

REV.
C

NIDEC MOTOR CORPORATION 14-Feb-12

MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN	
S63YZSHJ-7367		STANDARD	1/3	115	4.8	60	1725	CW LEAD END REV	3580	
REVISION RECORD FOR: C4997-16				INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION				NIDEC MOTOR CORPORATION		
SHEET NUMBER	REV	UPDATED BACKGROUND TO NIDEC.								
1 OF 1	C									
REVISION DATE										
14-FEB-12				ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN						
ISSUED BY	REVIEWED BY	ENGINEER APPROVED	TITLE				CODE	ITEM NO.	SIZE	
B. ANDRADE	J. I. SALAZAR	J. I. SALAZAR	ASSEMBLED VIEW				V01	268924	A	