


#16 GREEN/YELLOW GROUND LEAD TO BE 12.000±.250 BETWEEN CENTERS OF TERMINALS. TERMINAL TO FIT #10 SCREW

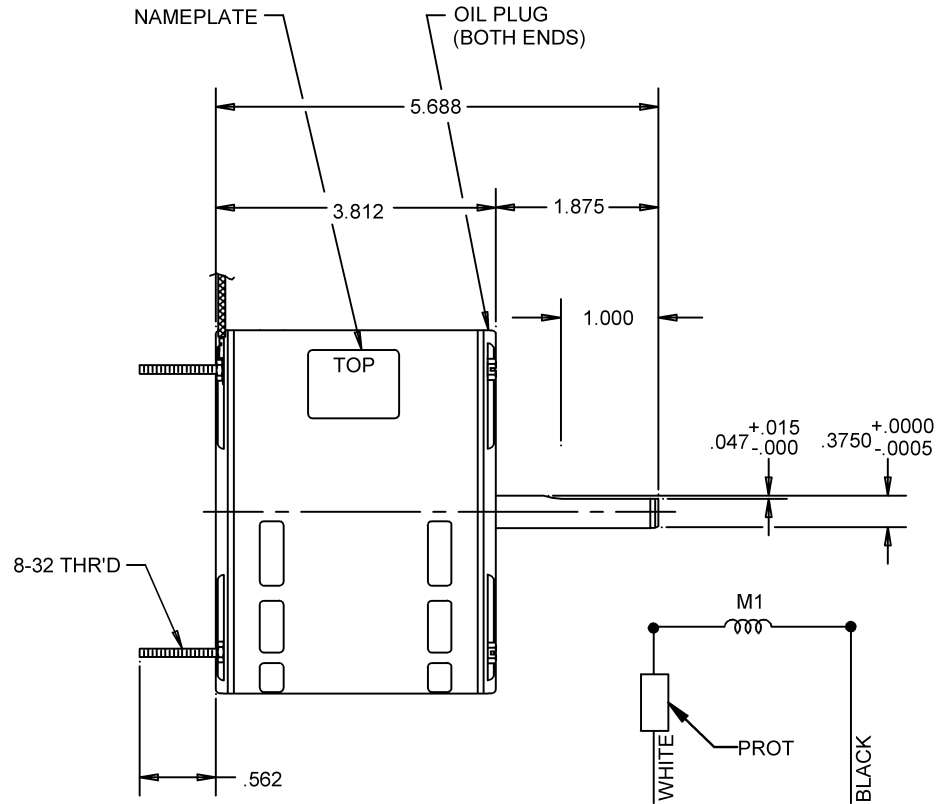

2 LEADS #18, .062 THICK INSUL. TO EXTEND BEYOND MOTOR
BLACK=19 +2 -0, WHITE=19 +2 -0

NOTE:
SHAFT ADAPTOR
SHIPPED DETACHED

REV.
E

NIDEC MOTOR CORPORATION 14-Nov-12

MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN
F48HXCSA-2703		STANDARD	1/10	115	3.7	60	1050	CCW LEAD END	CAT. NO. 1336

SHEET NUMBER	REV	REVISION RECORD FOR: C6473-00
1 OF 1	E	UPDATED BACKGROUND TO NIDEC
REVISION DATE		
30-OCT-12		

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

NIDEC MOTOR CORPORATION

ISSUED BY	REVIEWED BY	ENGINEER APPROVED
R. MORALES	J. I. SALAZAR	B. GAITAN

TITLE			CODE	ITEM NO.	SIZE
ASSEMBLED VIEW			V01	752865	A