


7 LEADS #18, .031 THICK INSUL. TO EXTEND BEYOND MOTOR THROUGH GROMMET
 WHITE=31.000 +2-0, BLACK=31.000 +2-0
 BLUE=31.000 +2-0, YELL=31.000 +2-0,
 RED=31.000 +2-0, BRN=8.000 +2-0,
 BRN/WHT=8.000+2-0

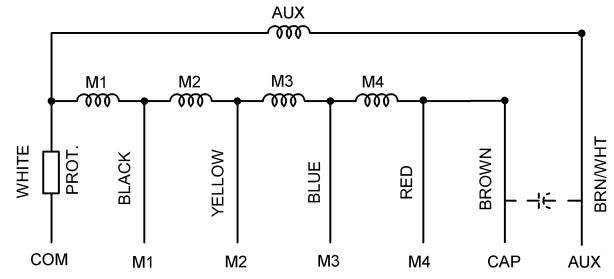

CAPACITOR
5 MFD, 370VAC
CUSTOMER PN
1180

NIDEC MOTOR CORPORATION 07-Jun-13

MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN
K48HXS NF-0197	A33055-X3	NIDEC MOTOR CANADA CORPORATION	1/8	115	2.0	60	1550	CW LEAD END	1180

SHEET NUMBER	REV	REVISION RECORD FOR: C7778-00	
1 OF 1	B	CHANGE POSITION OF LEADS.	
		CHANGE POSITION OF SEAM WELD.	
REVISION DATE			
6-JUN-13			
ISSUED BY	J. CASTILLO	REVIEWED BY	B. GAITAN
		ENGINEER APPROVED	M. LARGENT

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN

TITLE
ASSEMBLED VIEW

NIDEC MOTOR CORPORATION		