


VAR	MODEL	CUSTOMER	CAT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	P063FWN-1347	USEM	D12P2ACR	11.39	--	--	--	1/2	208 - 230/460	1.25	2.0-1.9/1.0	60&50	1725&1425	---	NONE	N56C, ODP
002	P063FZF-1354	USEM	D2P2ACR	12.89	--	--	--	2	208 - 230/460	1.15	6.1 - 6.2/3.1	60	1725	---	NONE	N56C, ODP
003	P063FPV-1741	USEM	D1P2ACR	12.39	--	--	--	1	208 - 230/460	1.15	3.2-3.0/1.5	60	1725	---	NONE	N56C, ODP
004	P063FRC-1747	USEM	D32P2ACR	13.86	--	--	--	1 1/2	208 - 230/460	1.15	4.2-4.0/2.0	60	1725	---	NONE	N56C, ODP

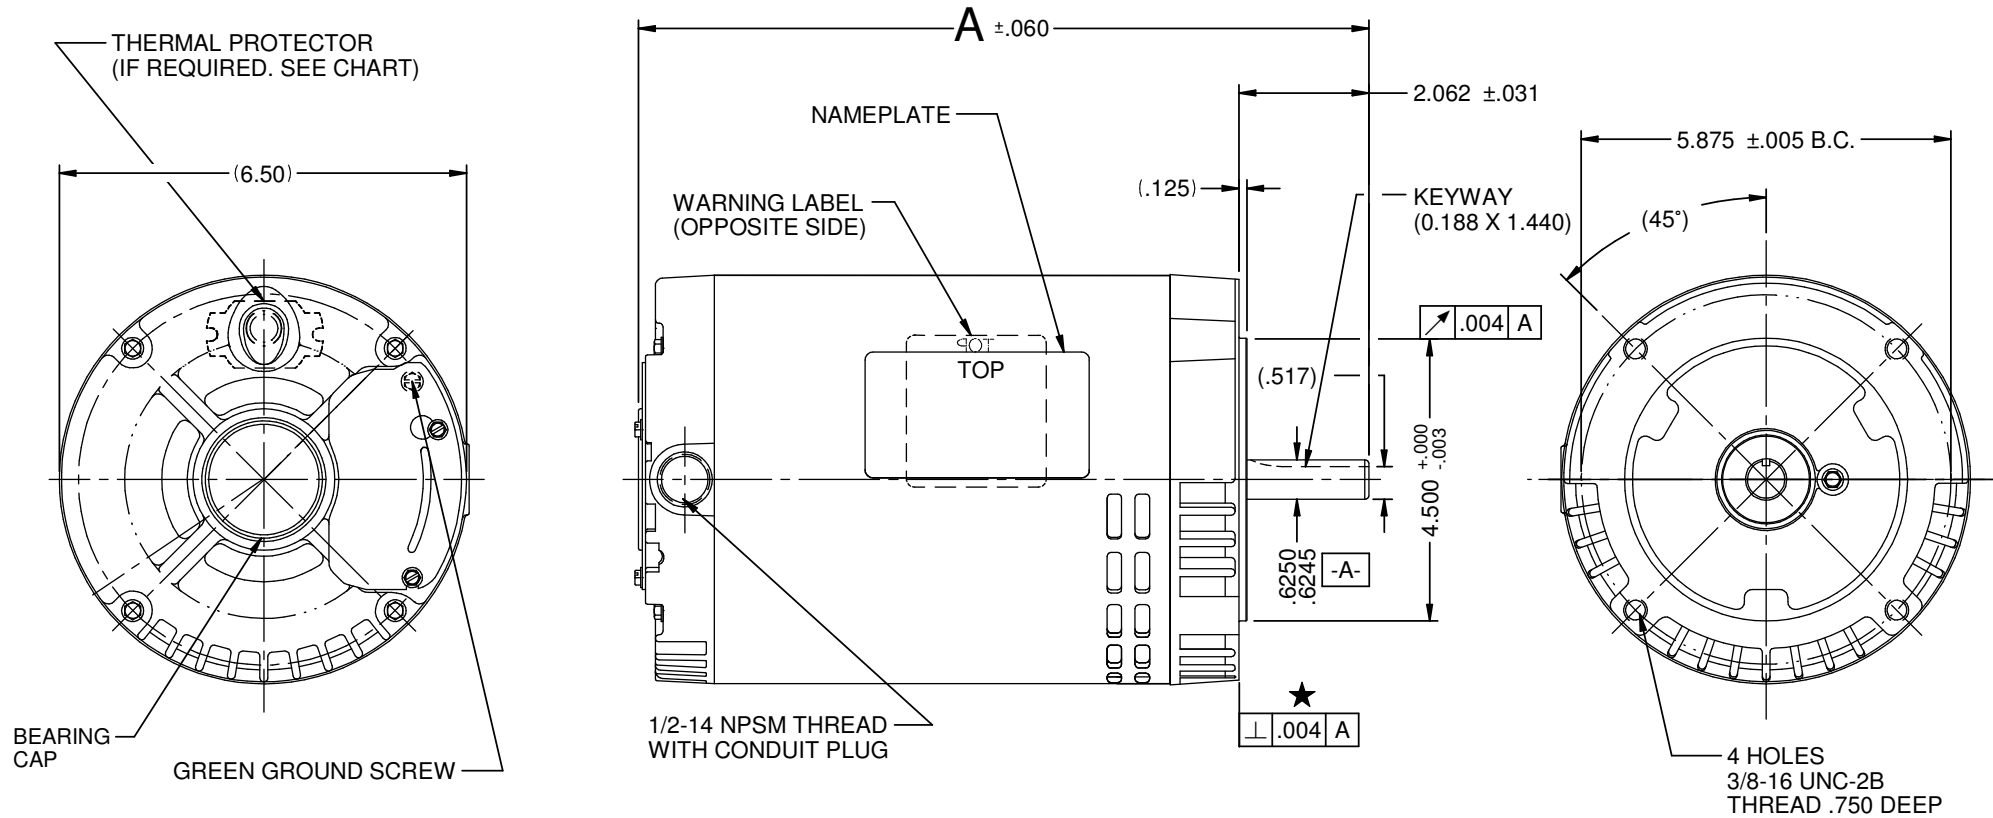

NIDEC MOTOR CORPORATION 31-Jul-19 CCW LEAD END ROTATION REVERSIBLE, TO REVERSE ROTATION INTERCHANGE ANY TWO LINE LEADS. REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: E34948		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		NIDEC MOTOR CORPORATION						
ADDED: COIL END SLEEVING				INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION						
				REVISION DATE: 31-JUL-19						
				TITLE						
ISSUED BY: C. RODRIGUEZ		ENGINEER APPROVED: M. SHUETTE		CUSTOMER DETAIL DRAWING		CODE: V02	ITEM NO.: 804533	REV: F	SHEET NUMBER: 1 OF 6	DWG SIZE: B
				ANGLES X° = ±1°						