
V02 USEM pg 1 English

VAR	MODEL	CUSTOMER	CAT. NO.	Α	В	С	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	T55JXCRK-1539	USEM	D13CPA1P49	9.94				1/3	115/230	1.35	3.7/1.8	60	3450		AUTO	N48 ODP

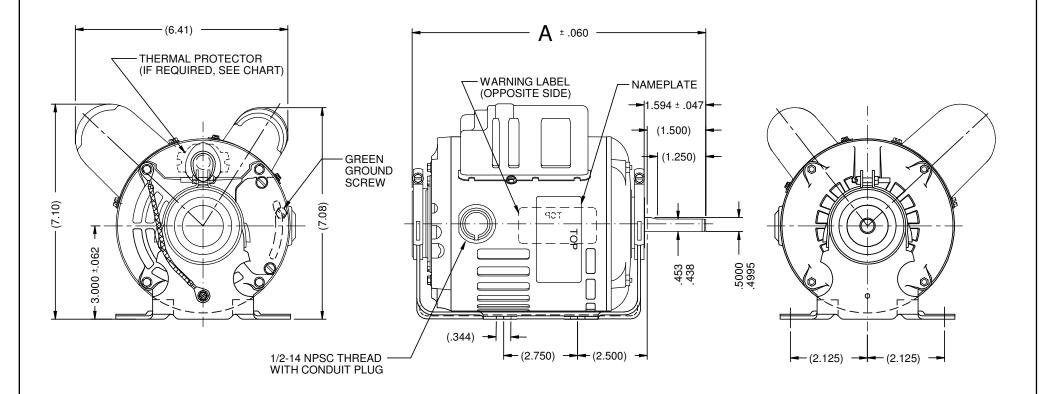

MOTOR IS CCW LEAD END, TO REVERSE ROTATION INTERCHANGE RED AND BLACK LEADS

REFER TO S.E.I.M. 24-1

NIDEC MOTOR CORPORATION 07-Apr-15	P REFER TO S.E.I.M. 24-									
REVISION RECORD FOR:	JC 69681		ON DIMENSIONS RWISE SPECIFIED)	NIDEC MOTOR CORPORATION						
OFFICE BLAWING		INCHES	<u>mm</u>	INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPF REPRODUCED OR DISCLOSEDWITHOUT WRITTEN CONSENT OF NIDE		REVISION DATE: 11-MAY-15				
ISSUED BY: N. MARTINEZ ENGINEER APPROVED: T. BOSSA	ALLER	.XX = ± .010 .XXX = ±.005	S X°= ±1°	CUSTOMER DETAIL DRAWING	V02	1TEM NO. 804712	REV	SHEET NUMBER 1 OF 4	DWG SIZE B	
V02 NMCB (MAR-2014)						-			SOLIDEDGE	