


MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER P.N.	DESCRIPTION / REMARKS
K55HXRKR-2197	C41319	WHOLESALE HAC	1/3	208-230	2.6	60	1075/3 SPD	CCW LEAD END	NA1036	K55 S/A BRG. OPEN STUD MTD


NOTE:  
KIT WITH BRACKET ASSEMBLY. RINGS SCREWS  
AND NUTS TO BE INCLUDED IN CARTON BOX.

AUTOMATIC THERMAL  
PROTECTOR

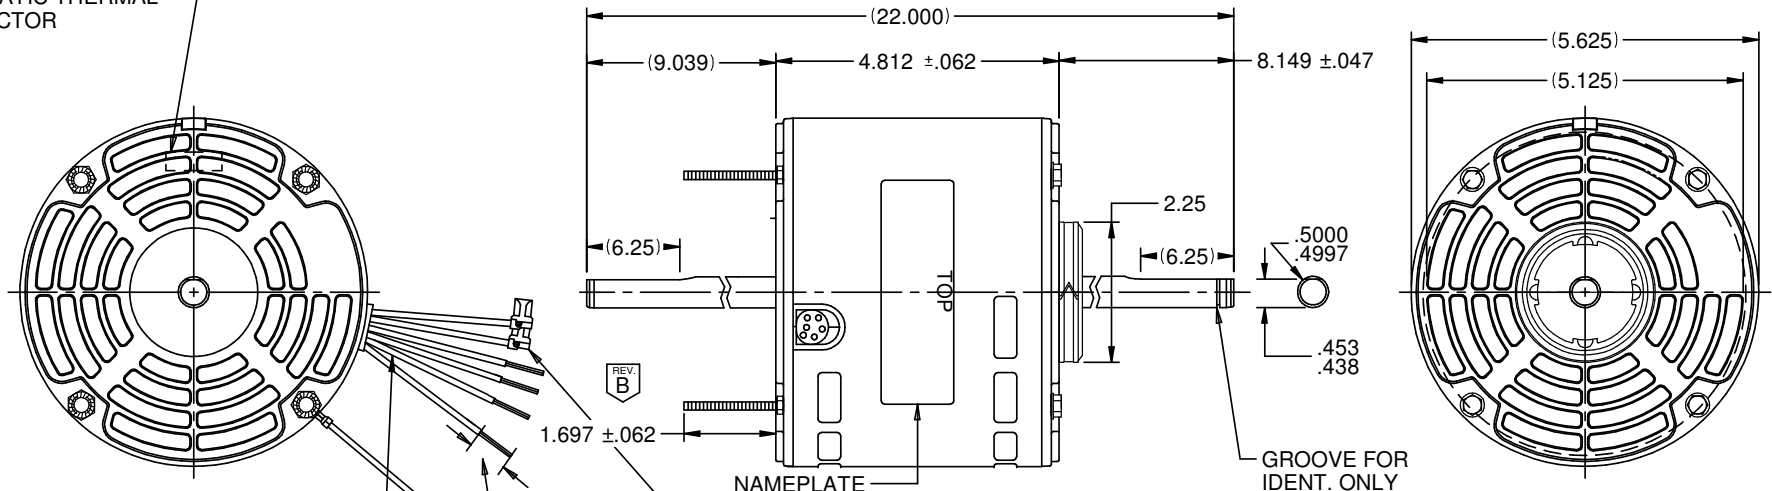

6 LEADS, #18, .031 THICK INSUL.  
TO EXTEND BEYOND MOTOR;  
WHT=36.0 +/-1, BLUE=36.0 +/-1  
BLK=36.0 +/-1, RED=36.0 +/-1  
BRN=36.0 +/-, BRN/WHT STRIPE 36.0 +/--1  
LEADS TO BE PROTECTED WITH  
GROMMET.

#16 GREEN ROUND LEAD TO BE  
24 +/- .250 BETWEEN CENTER OF  
TERMINALS, TERM TO FIT #10 SCREW.

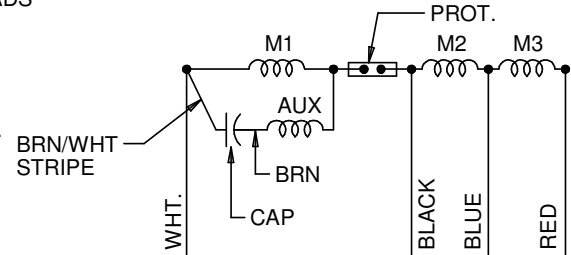

COLOR CODE

WHITE	-	COMMON
BLACK	-	HIGH
BLUE	-	MED
RED	-	LOW
BROWN	-	CAPAC.

NIDEC MOTOR CORPORATION 03-Mar-16

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: ECO: E25066		DIMENSIONS ARE FOR REFERENCE ONLY		<b>NIDEC MOTOR CORPORATION</b> INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION				REVISION DATE: 03-MAR-16	
UPDATE DIMENSION IN SCREW		UNLESS TOLERANCE IS SPECIFIED						TITLE: CUSTOMER DETAIL DRAWING	CODE: V02
ISSUED BY: F. GARCIA	ENGINEER APPROVED: A. VILLANUEVA								

V02\_NMCB (MAR-2014)

SOLIDEDGE