


MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	NO. PART.CUST	DESCRIPTION / REMARKS
K55HXJZK-3127		STANDARD	1/4	460	.9	50/60	1625	CW. LEAD END	CATALOG 6139	K55 RES MTD. SELF-ALIGN BRG. OPEN E-LOC

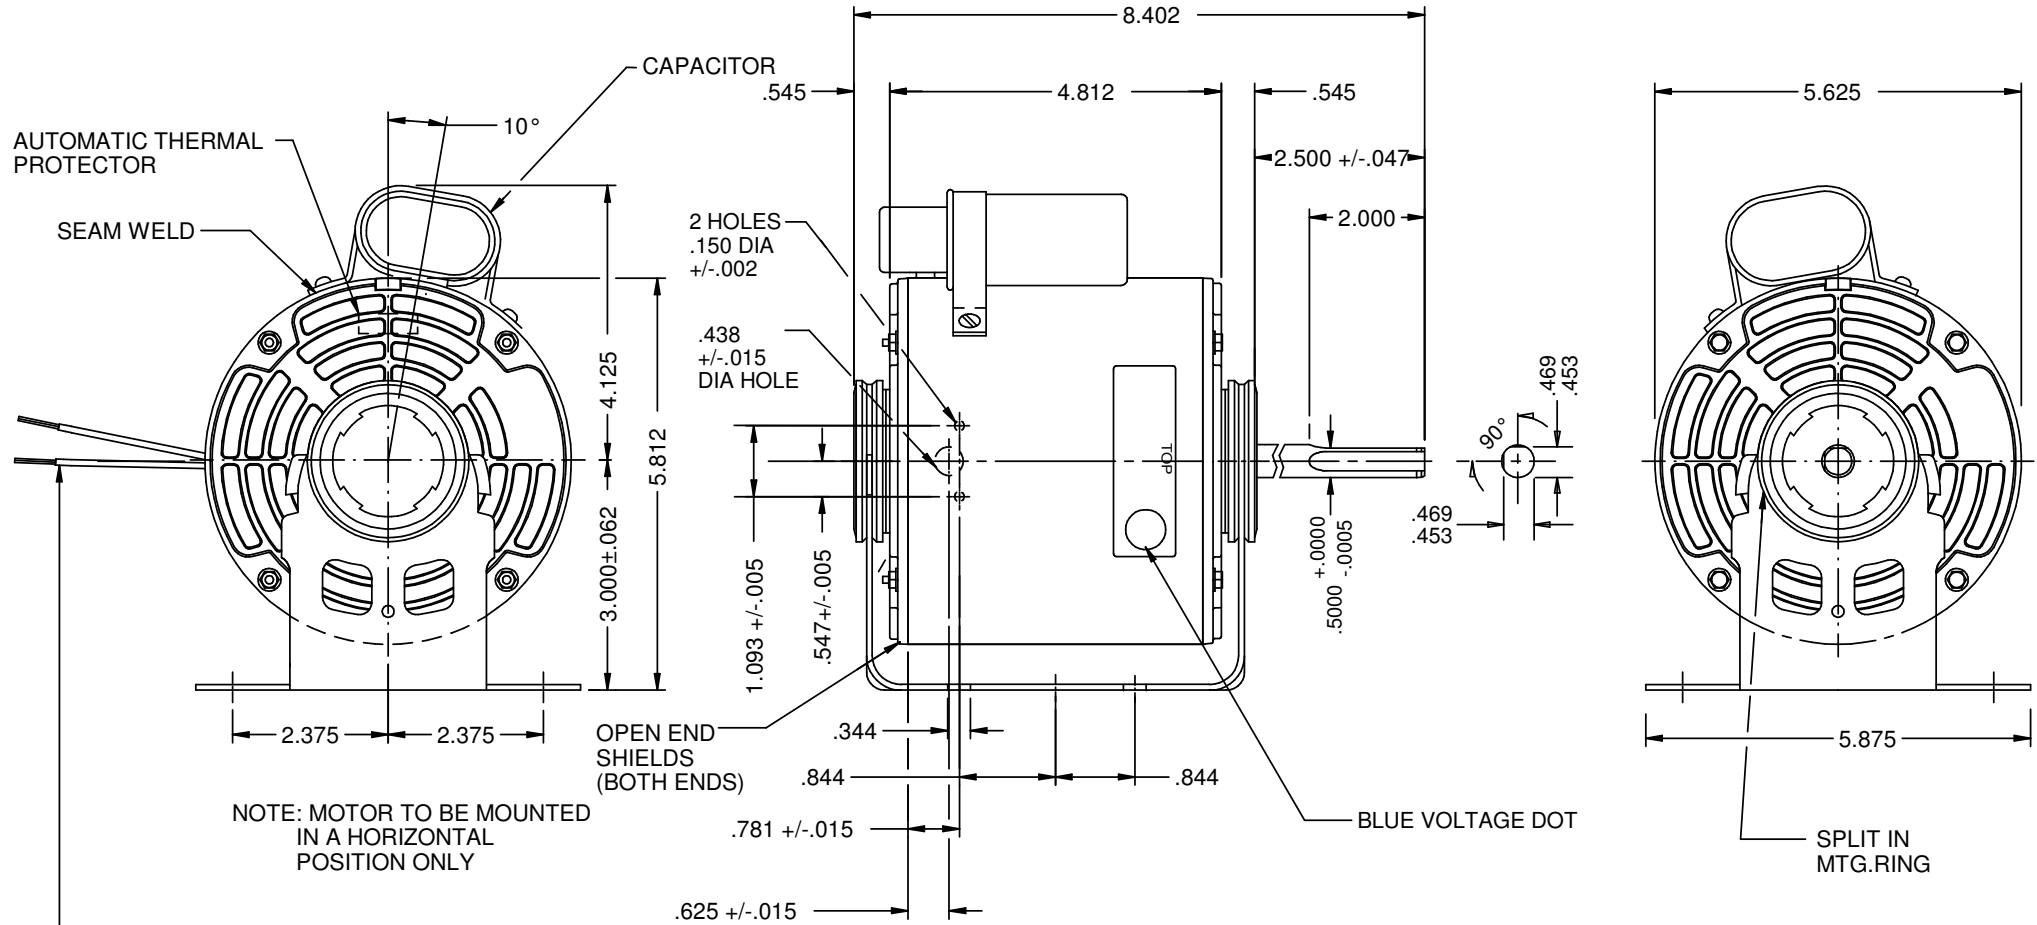

NOTE: MOTOR TO BE MOUNTED IN A HORIZONTAL POSITION ONLY

2 LEADS, #12, .062 THICK INSUL. TO EXTEND BEYOND MOTOR
 BLK.=36.000 +3-0, BLK.=36.000 +3-0
 WHIT 1/2" STRIPPED TERMINATION.

NOTE: BASE CLAMP ASSEMBLIES TO BE TAPED ON MOUNTING BASE.

NIDEC MOTOR CORPORATION 12-Oct-16

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: JC-71196		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		NIDEC MOTOR CORPORATION			
CREATED DRAWING		INCHES XX = ± .010 XXX = ± .005		mm		INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION	
ISSUED BY: C.ALMAGUER		ENGINEER APPROVED: H.NAVARRO		ANGLES X° = ±1°		REVISION DATE: 11-OCT-16	
CUSTOMER DETAIL DRAWING				CODE: V02	ITEM NO.: 812911	REV: --	SHEET NUMBER: 1 OF 3
						DWG SIZE: B	