VAR	MODEL	CUSTOMER	CATALOG NO.	A	B	C	PROTECOR	BASE REQUIREMENT	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	DESCRIPTION / REMARKS
001	P63FFS-1556	USEM	T1P2GH	12.88	------	------	NONE	56H	1	575	1.15	1.3	60	1725		56H TEFC

A ±.060
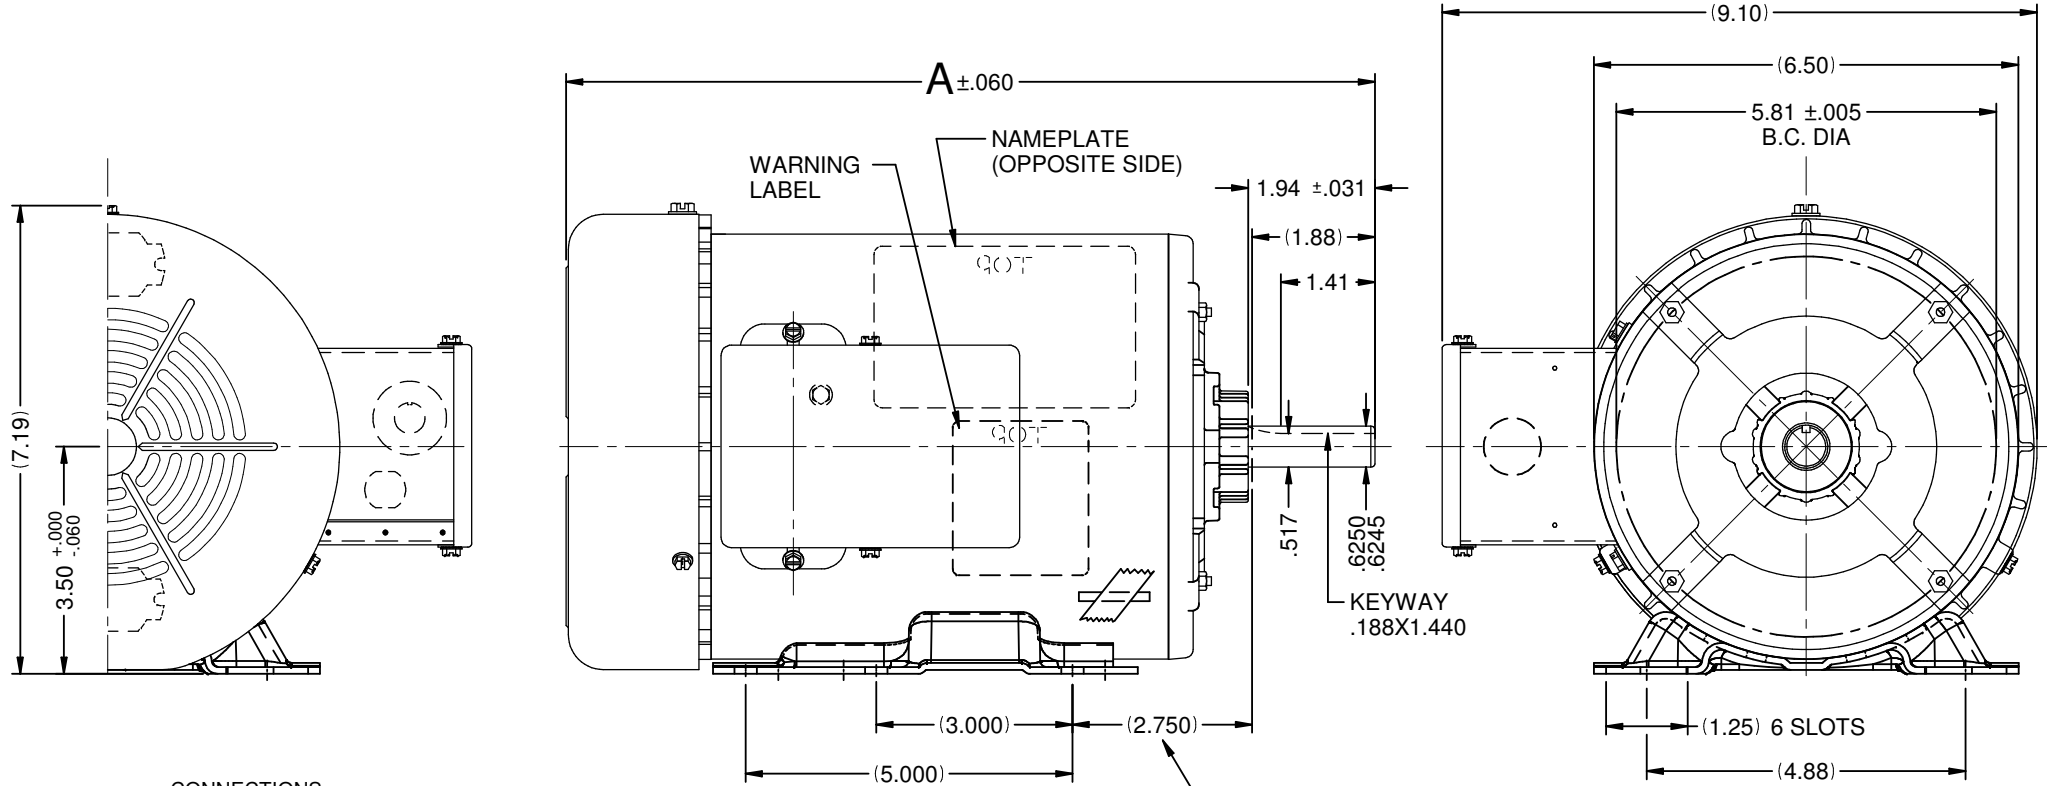
NAMEPLATE (OPPOSITE SIDE)

WARNING LABEL

1.94 ±.031
(1.88)
1.41

.517
.6250 / .6245

KEYWAY .188X1.440

(7.19)
3.50 +.000 / -.060

(3.000)   (2.750)
(5.000)

SEE CHART FOR BASE REQUIREMENT (IF REQ'D)

(9.10)
(6.50)
5.81 ±.005 B.C. DIA

(1.25) 6 SLOTS
(4.88)

CONNECTIONS

① ② ③

L1 PHASE A   L2 PHASE B   L3 PHASE C

CW LEAD END
TO REVERSE ROTATION
INTERCHANGE ANY TWO LINE LEADS

ROTATION: REVERSIBLE

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR:	JC 71586	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		**NIDEC MOTOR CORPORATION**				
CREATED DRAWING.				INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSEDWITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION			REVISION DATE : 03-ABR-17	
		INCHES .XX = ± .010 .XXX = ±.005	mm	TITLE CUSTOMER DETAIL DRAWING	CODE V02	ITEM NO. 815186	REV -	SHEET NUMBER 1 OF 4 / DWG SIZE B
ISSUED BY : B. ANDRADE	ENGINEER APPROVED : T. BOSSALLER	ANGLES X°= ±1°						

V02_NMCB (MAR-2014)   SOLIDEDGE