


MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CAT. NO.	DESCRIPTION / REMARKS
K55HXTLZ-9493		STANDARD	1/2	208-230	3.3	60	1075/3 SPD	REVERSIBLE	3788	K55 HUBLESS SELF-ALING BRG, OPEN

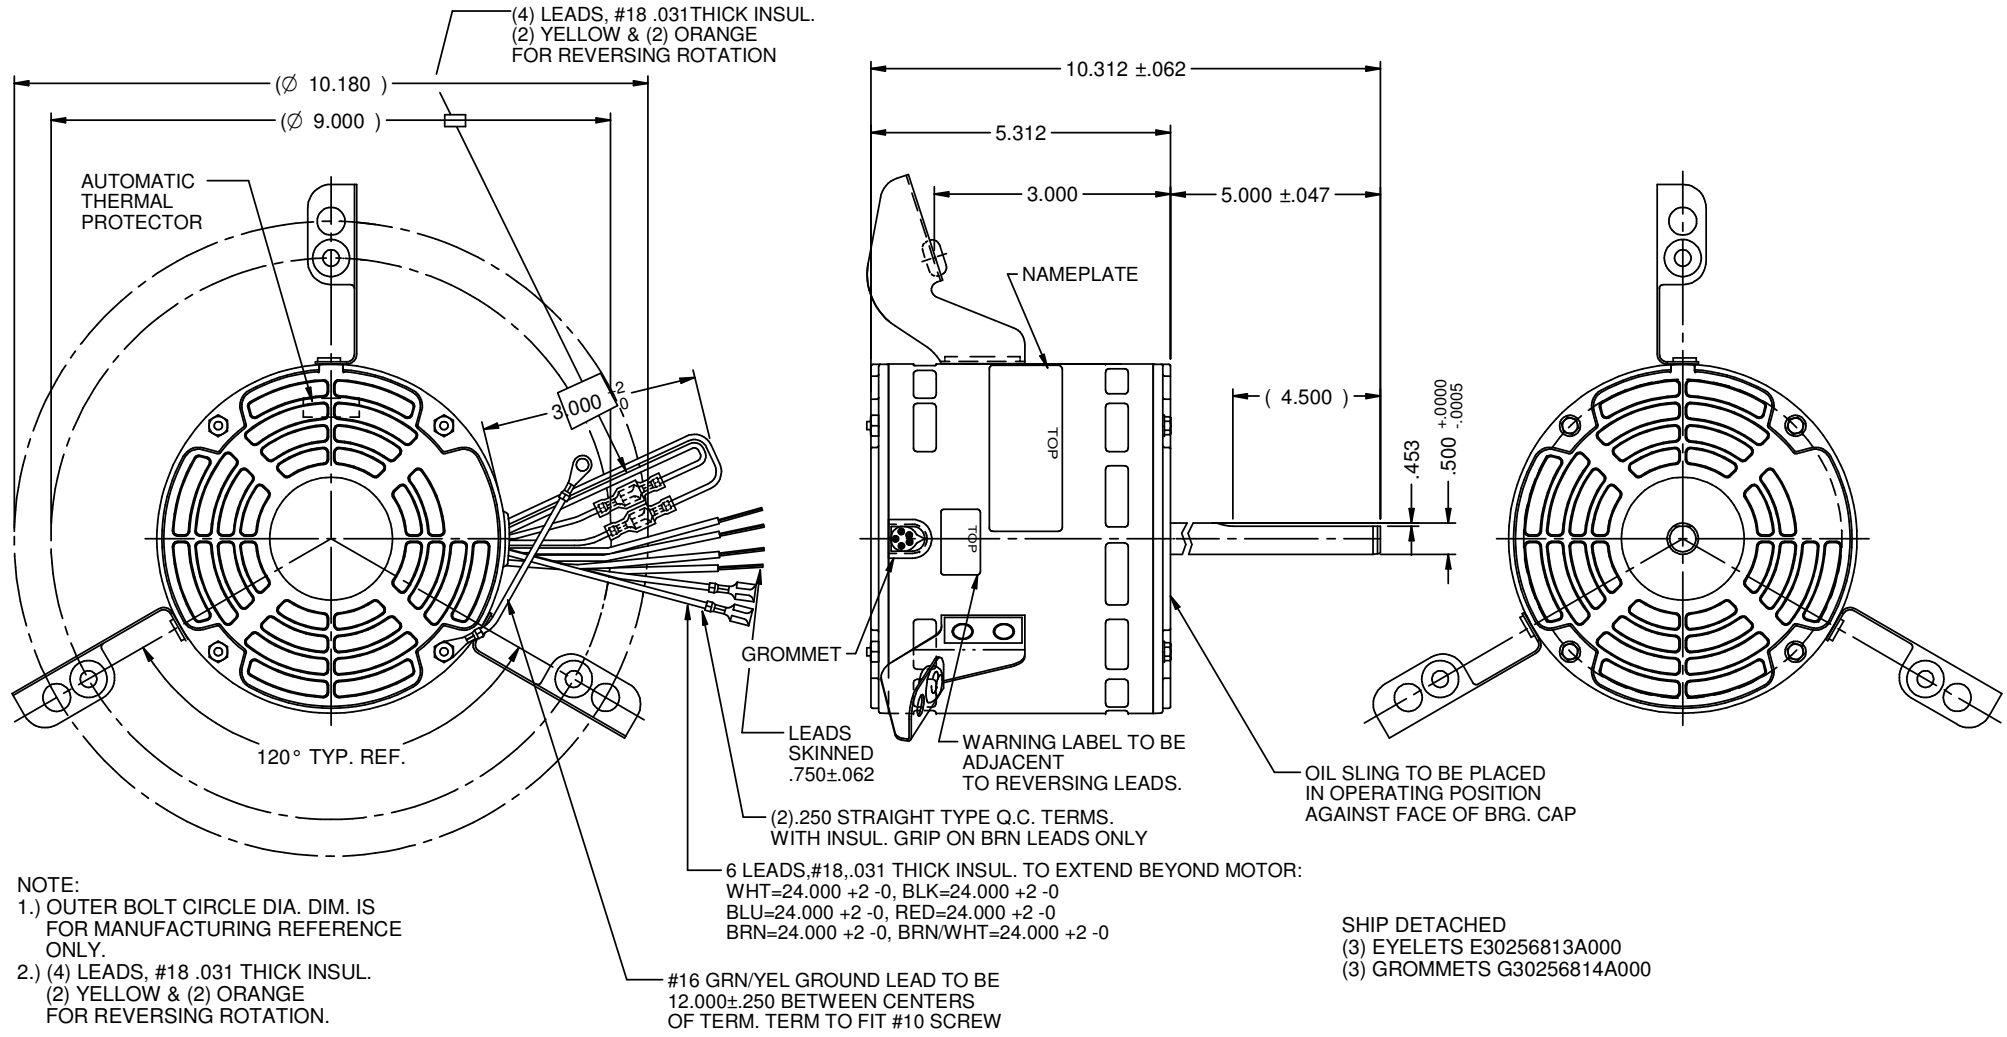

NOTE:
1.) OUTER BOLT CIRCLE DIA. DIM. IS FOR MANUFACTURING REFERENCE ONLY.
2.) (4) LEADS, #18 .031 THICK INSUL. (2) YELLOW & (2) ORANGE FOR REVERSING ROTATION.

ROTATION: C.CW. LEAD END REV.

REFER TO S.E.I.M. 24-1

NIDEC MOTOR CORPORATION 11-Dec-18

NEW DRAWING.	REVISION RECORD FOR:	ECO: E32641
ISSUED BY:	ENGINEER APPROVED:	
G. ISASSI	Z. TREVIÑO	

DIMENSIONS ARE FOR REFERENCE ONLY
UNLESS TOLERANCE IS SPECIFIED

NIDEC MOTOR CORPORATION			
INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION			
TITLE		CODE	ITEM NO.
CUSTOMER DETAIL DRAWING		V02	824104
REVISION DATE:	12-DEC-18	REV	SHEET NUMBER
		-	1 OF 3
			DWG SIZE
			B