


MODEL	REF	CUSTOMER	CUSTOMER PN	HP	VOLTS	AMPS	HZ	RPM	ROTATION	DESCRIPTION / REMARKS
K55HXTMS-9565		STANDARD	3275	3/4	115	10.0	60	1075/SPD	CCW LEAD END	K55 HUB MTD, BALL/BALL BRG. OPEN

NOTE:
 POSITION OF BEARING CAP RELATIVE
 TO ENDSHIELD (VIEWING LEAD END)
 LEAD END - SLIT ON BONDED OUTER
 RING SHOULD BE NEAREST TO 3:00
 OPPOSITE
 LEAD END - SHOULD BE NEAREST TO 9:00

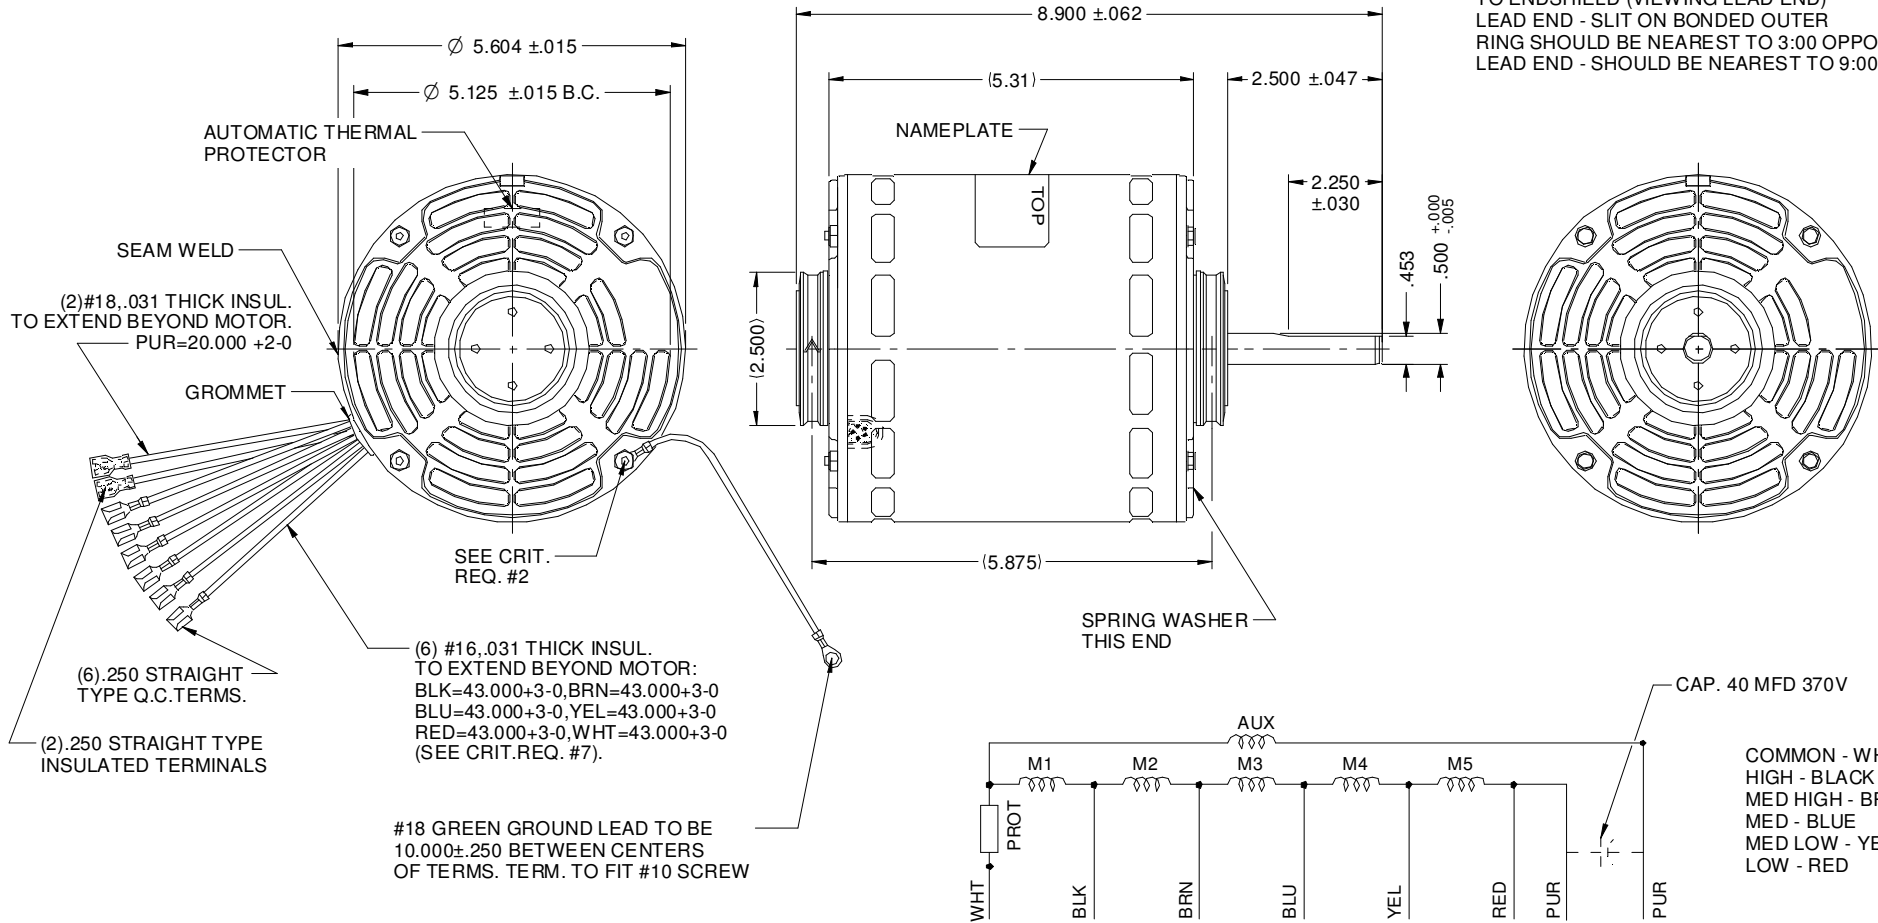

NIDEC MOTOR CORPORATION 09-Oct-19

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: ECO E35490	
ASSEMBLE INSTRUCTION #1 WAS MODIFIED	
ISSUED BY: C. TORRES	ENGINEER APPROVED: D. TEJEDA

DIMENSIONS ARE FOR REFERENCE ONLY

UNLESS TOLERANCE IS SPECIFIED

NIDEC MOTOR CORPORATION

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

REVISION DATE: 04-OCT-19

TITLE	CODE	ITEM NO.	REV	SHEET NUMBER	DWG SIZE
CUSTOMER DETAIL DRAWING	V02	825016	B	1 OF 3	B