

ZS-CCV... New Control Valve Weather Shield



Installation Instructions




APPLICATION

The ZS-CCV... weather shield provides moderate protection for valves which are mounted outdoors. This product is designed as a water tight enclosure. The housing allows easy mounting over the actuator, while allowing easy viewing of the actuator in operation.

Weather shield for PICCV/CCV to provide protection for actuators in outdoor applications.

Specifications

Cover	PETG with UV resistant smoke tint
Perimeter Gasket	Silicon Rubber
Rubber Gasket	Silicon Rubber
Spring Clips	Stainless Steel
Temperature limitations:	-22°F to 122°F (-30°C to 50°C)
Plate (ZS-CCV-100)	Aluminum
Plate	Galvaneal w/black powder coat

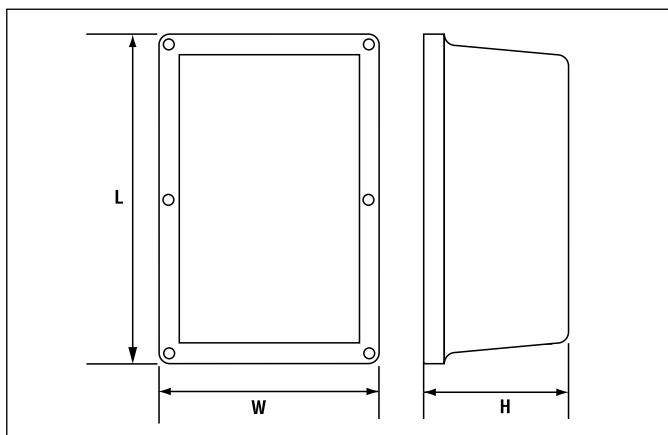

Part Number	For Actuator
ZS - CCV - 50	LR
ZS - CCV - 60	LF
ZS - CCV - 90	AF
ZS - CCV-100	LRB(X), ARX

Part Number	L	W	H
ZS - CCV - 50			
ZS - CCV - 60	10" [254]	7.75" [197]	4" [100]
ZS - CCV - 70			
ZS - CCV - 90	16.25" [413]	8.75" [222]	4.5" [114]
ZS - CCV-100	15.67" [398]	7.61" [193]	4.0" [102]

Designed for NEMA 4 specifications.

Note: For LRB, LRX and ARX, please contact Customer Service for the ZS-CCV-100 availability @ 800-543-9038.

PARTS LIST

Cover including Rubber Perimeter Gasket, Rubber Gasket
 Back Plate
 Anti-Rotation Post with screw and lock washer
 Valve Gasket
 Assorted Cap plugs for unused holes

Screws: LF/LR - 2 screws provided
 AM - 2 screws provided
 AF - 2 bolts with nylon insert locking nuts
 LRB(X), ARX - 1 screw, 1 washer